


## TAPL-100-10-12 - Mid-Strength Anchor Helix

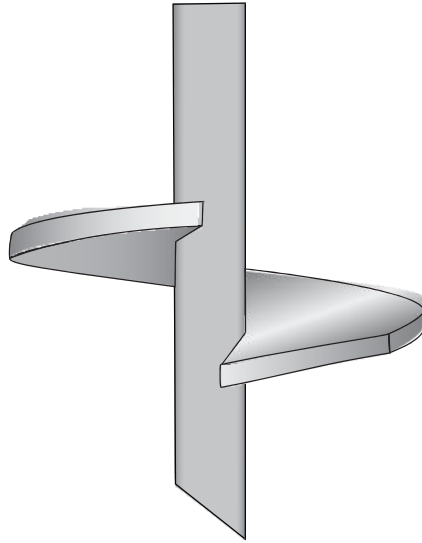

### Product Specifications

|                       |                                       |
|-----------------------|---------------------------------------|
| Anchor Style          | Power Installed Torque Anchor         |
| Number of Helices     | 1                                     |
| Single Helix          | 12" (305 mm)                          |
| Rod Diameter          | 3/4" (19.1 mm) or 1" (25.4 mm)        |
| Torque Rating         | 6,000 ft lbs (8,136 N-M)              |
| Square Hub            | 1.375" (34.9 mm)                      |
| Coating               | Painted (optional Hot-Dip Galvanized) |
| Standard Package      | 2 per Box 48 per PLT                  |
| Standard Package Unit | Each                                  |
| Min Order Qty         | 1                                     |
| Weight/Ea             | 16 lbs                                |

**Notes:** Mid-Strength Anchor Helix; 6,000 ft lbs (8,136 N-M), 12" (305 mm) Helix for use with 3/4" (19.1 mm) or 1" (25.4 mm) rod



Certified Installers/Exclusive Dealers - CA, NV, AZ